




RICHTA Thermal Receipt Printer


Q200EU

- Support IAP update online(Except USB+Serial/USB/Lan)
- Compatible with ESC/POS
- Support queuing function(Except tUSB+Serial/USB/Lan)
- With the function of avoiding missing orders
(Except USB+Serial, USB, Lan)
- Supports IP modification across network segments
(Except USB+Serial, USB, Lan)
- With print-head over temperature protection function

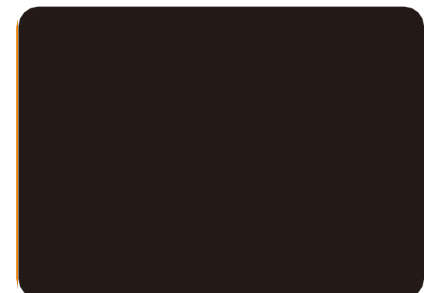

Q200EU

Thermal Receipt Printer



Printing method	Direct thermal	
Paper width	79.5±0.5mm x cpB0mm	
Print width	72mm	
Column capacity	576 dots/line or 512 dots/line	
Printing speed	200mm/s Max.	260 mm/s Max.
Interface	USB / USB+Serial Lan / USB+Lan	USB+Serial+Lan USB+Serial+Lan+Bluetooth USB+Serial+Lan+Wifi
Line spacing	3.75mm (Adjustable by commands)	
Column number	80mm paper : Font A - 42 columns or 48 columns/Font B - 56 columns or 64 columns/ Simplified/Traditional Chinese - 21 columns or 24 columns	
Character size	ANK, Font A: 1.5 x 3.0mm (12 x 24 dots) Font B: 1.1 x 2.1mm (9 x 17 dots) Simplified/Traditional Chinese : 3.0 x 3.0mm (24 x 24 dots)	

Auto cutter	Partial
-------------	---------

Extension character sheet	PC347(Standard Europe)/ Katakana/ PC850(Multilingual) / PC860(Portugal) / PC863(Canadian) / PC865(Nordic) / West Europe/ Greek/ Hebrew/ East Europe/ Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / PC858 / IranII / Latvian/ Arabic/ PT151 (1251)
1D Barcode	UPC-A/UPC-E/ JAN13 (EAN13) / JANS (EANS) / CODE39/ITF / CODABAR/CODE93/CODE128
2D Barcode	QR CODE/ PDF417 (Except USB+Serial / USB / Lan)
Input buffer	128 Kbytes; 64 Kbytes (USB+Serial / USB / Lan)
NV Flash	256 Kbytes

Power adaptor	Input : AC 110~240V, 50~60Hz, Output: DC 24V/2.5A
Printer Input	DC 24V/2.5A
Cash drawer	DC24V/1A

Weight	1.0 Kg
Dimensions	190.13 (D) * 140 (W) * 134.64 (H) mm

Work environment	Temperature (0~45 °C) humidity(10~80%)
Storage environment	Temperature (-10~60 °C) humidity(10~90%)

Cutter life	1.5 million cuts
Printer head life	150Km

Emulation	ESC/POS
Driver	Windows/JPOS/Linux/OPOS/Android/Mac
Utility	Windows & Linux test Utility
SOK	iOS, Android, Windows



IOS



@Fe(€ CB @